

Clear-span width

800 cm

side height

230 cm

ridge height

360 cm

Roof pitch

18°

Bay distance

300/500 cm

Gable uprights

1 gable upright (per end)

Longest component

429/549 cm

Minimum tent length

600/500 cm (1000cm with portal beams)

Maximum tent length

No limit

Main profile

110 x 68 x 3mm

Eave / corner connection

Internal eave insert

Max. allowed wind speed to DIN

50 mph windloading

0.3 kN/m²

Extension / lean-to options

Extension (max. span 300 cm located anywhere, both sides, any length),
½ hexagonal at gable end

Flooring options

Woodenfloor with timber or steel

sub-construction

Aluminium cassetefloor with plywood or full

aluminiumboards

Compactfloor

Cover




RÖDER No. 1: PVC-coated polyester textile,
flame retardant to DIN 4102 B1, M2

Special design

Portal beams can be used in place of cross
struts

By using woodenfloor with steel
sub-construction and weights anchoring can be
omitted

By using compactfloor anchoring can be omitted

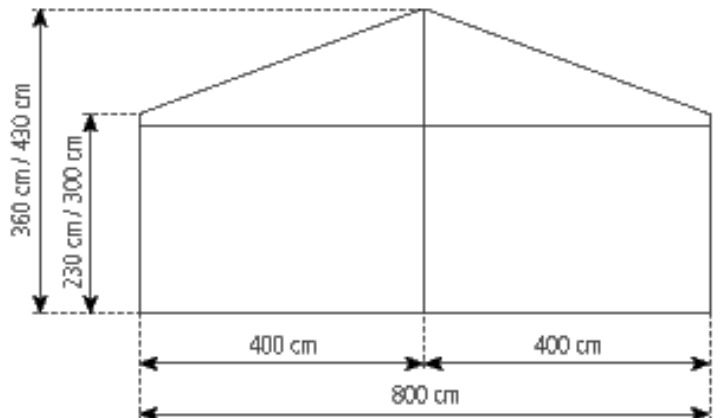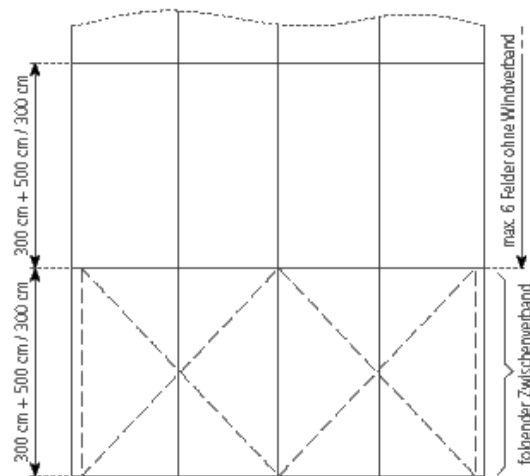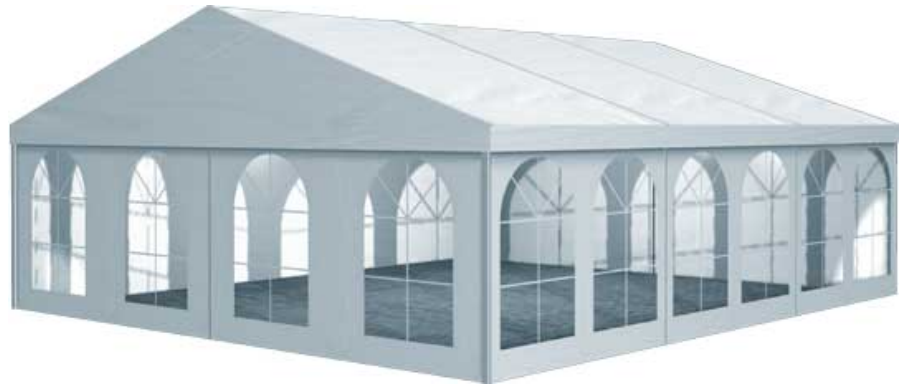

23.09.2008, www.r-zs.de/en/35

RÖDER Zelt- und Veranstaltungsservice GmbH
63654 Büdingen Fon: +49 06049 700-0
Verkauf: Am Lautenstein Fax: +49 06049 700-339
Vermietung: An den Ellern Fon: +49 06049 700-309
HRB 3261, Friedberg UST.-IdNr.: DE 112607812

Geschäftsführer:
Rüdiger Blasius
Jens Brüggemann
St.-Nr.: 20 242 70249

Bank:
WGZ Bank eG
KBC Bank DTLG AG
Fortis Bank
Duns-Nr.: 32-239-9494

IBAN BLZ Konto
DE73 400 600 00 0000 772 633
DE86 500 203 00 0000 295 086
DE15 370 106 00 1102 421 161
info@r-zs.com

SWIFT/BIC
GENO DE MS
BANV DE HB 500
GEBAD3 33
www.r-zs.com