

# Big Tent 15M



## Clear-span width

1500 cm

## Side height

300 cm

## Ridge height

540 cm

## Highest point

868 cm

## Roof pitch

18°

## Bay distance

500 cm

## Gable uprights

2 gable uprights (per end)

## Longest component

800 cm

## Minimum tent length

3000 cm

## Maximum tent length

No limit

## Main profile

220 mm x 100 mm x 3 mm

## Eave / corner connection

Slide connection

## Max. allowed wind speed to DIN

100 km/h

## Wind Load

0.5 kN/m<sup>2</sup>

## Extension / lean-to options

Extension (max. span 400 cm, located anywhere, both sides, any length)

1/2 octagonal at gable end

## Flooring options

Wooden floor with timber or steel sub-construction

Aluminium cassette floor with plywood or full aluminium boards

Compact floor



## Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

## Special design

Portal beams can be used in place of cross struts

By using compact floor anchoring can be omitted

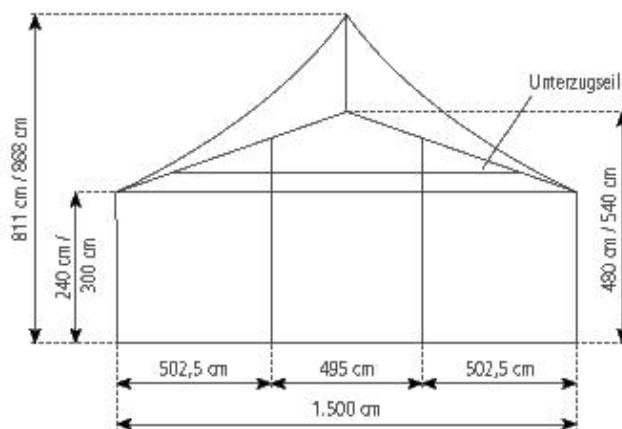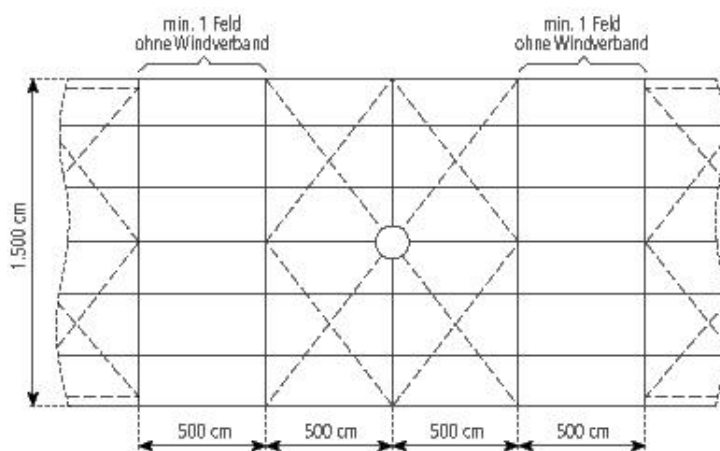

27.09.2011, [www.r-zs.de/en/tents/pdf/57](http://www.r-zs.de/en/tents/pdf/57)

RÖDER Zelt- und Veranstaltungsservice GmbH  
63654 Büdingen  
Fon: +49 06049 700-0  
Fax: +49 06049 700-339  
Am Lautenstein  
An den Ellern  
Fon: +49 06049 700-309  
HRB 3261, Friedberg  
UST.-IdNr.: DE 112607812

Geschäftsführer:  
Rüdiger Blasius  
Jens Brüggemann  
Thomas Roman  
St.-Nr.: 020 225 62014

Bank:  
WGZ Bank eG  
KBC Bank DTLD AG  
Fortis Bank  
Duns-Nr.: 32-239-9494

IBAN BLZ Konto  
DE73 400 600 00 0000 772 633  
DE86 500 203 00 0000 295 086  
DE15 370 106 00 1102 421 161  
info@r-zs.com

SWIFT/BIC  
GENO DE MS  
BANV DE HB 500  
GEBADE 33  
www.r-zs.com