

Big Tent 15M



Clear-span width

1500 cm

Side height

300 cm

Ridge height

540 cm

Roof pitch

18°

Bay distance

500 cm

Gable uprights

2 gable uprights (per end)

Longest component

800 cm

Minimum tent length

1000 cm

Maximum tent length

No limit

Main profile

220 mm x 100 mm x 3 mm

Eave / corner connection

Slide connection

Max. allowed wind speed to DIN

100 km/h

Wind Load

0.5 kN/m²

Extension / lean-to options

Extension (max. span 400 cm, located anywhere, both sides, any length)

1/2 octagonal at gable end

Flooring options

Woodenfloor with timber or steel

sub-construction

Aluminium cassetefloor with plywood or full aluminiumboards

Compactfloor




Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design

Portal beams can be used in place of cross struts

By using compactfloor anchoring can be omitted

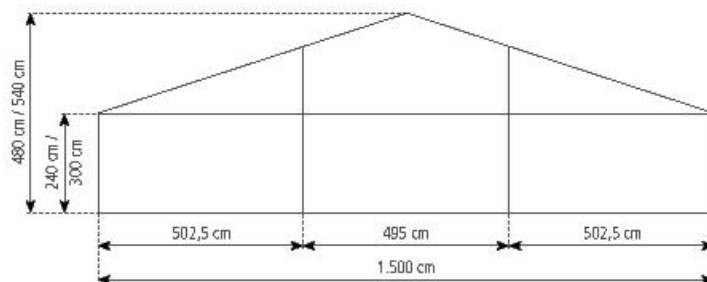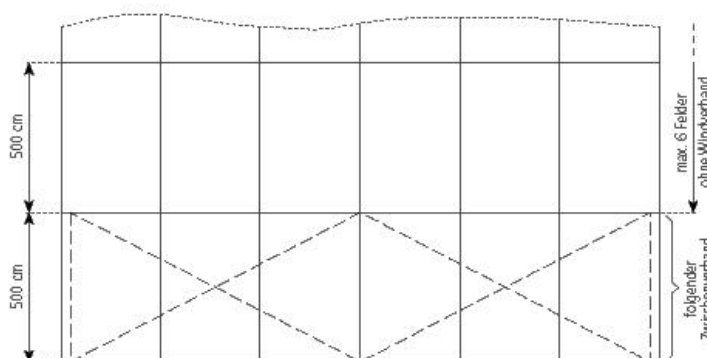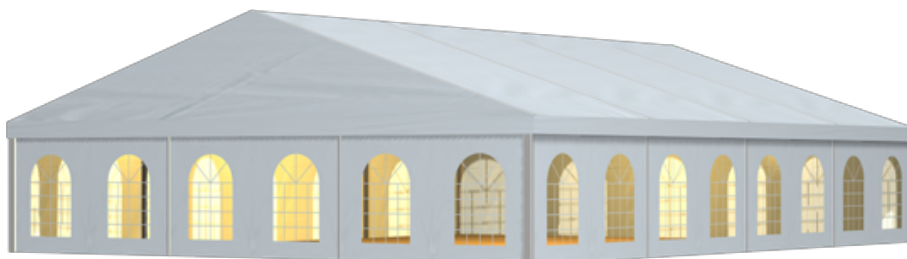

27.09.2011, www.r-zs.de/en/tents/pdf/55

RÖDER Zelt- und Veranstaltungsservice GmbH
63654 Büdingen
Fon: +49 06049 700-0
Verkauf: Am Lautenstein
Fax: +49 06049 700-339
Vermietung: An den Ellern
Fon: +49 06049 700-309
HRB 3261, Friedberg
UST.-IdNr.: DE 112607812

Geschäftsführer:
Rüdiger Blasius
Jens Brüggemann
Thomas Roman
St.-Nr.: 020 225 62014

Bank:
WGZ Bank eG
KBC Bank DTLD AG
Fortis Bank
Duns-Nr.: 32-239-9494

IBAN BLZ Konto
DE73 400 600 00 0000 772 633
DE86 500 203 00 0000 295 086
DE15 370 106 00 1102 421 161
info@r-zs.com

SWIFT/BIC
GENO DE MS
BANV DE HB 500
GEBADE 33
www.r-zs.com