

Big Tent 25M



Clear-span width

2500 cm

Side height

300 cm

Ridge height

700 cm

Roof pitch

18°

Bay distance

500 cm

Gable uprights

4 gable uprights (per end)

Longest component

1325 cm

Minimum tent length

2000 cm

Maximum tent length

No limit

Main profile

220 mm x 100 mm x 4 mm

Eave / corner connection

Twin-pin connection with corner and ridge strut

Max. allowed wind speed to DIN

100 km/h

Wind Load

0.5 kN/m²

Extension / lean-to options

Extension (max. span 400 cm, located anywhere, both sides, any length)
1/2 Decagonal at gable end

Flooring options

Woodenfloor with timber and steel sub-construction
Aluminium cassettefloor with plywood or full aluminiumboards



Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design

Spars with site joint permit the construction of a 15 m or 20 m tent with the same frame components

Portal beams can be used in place of cross struts

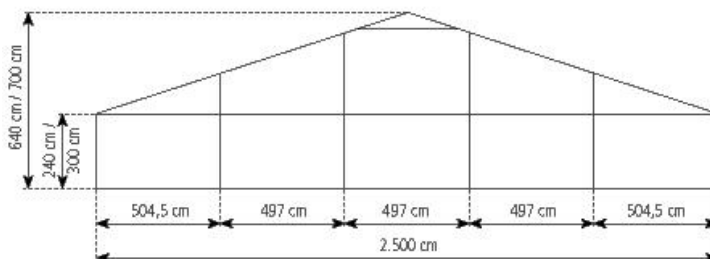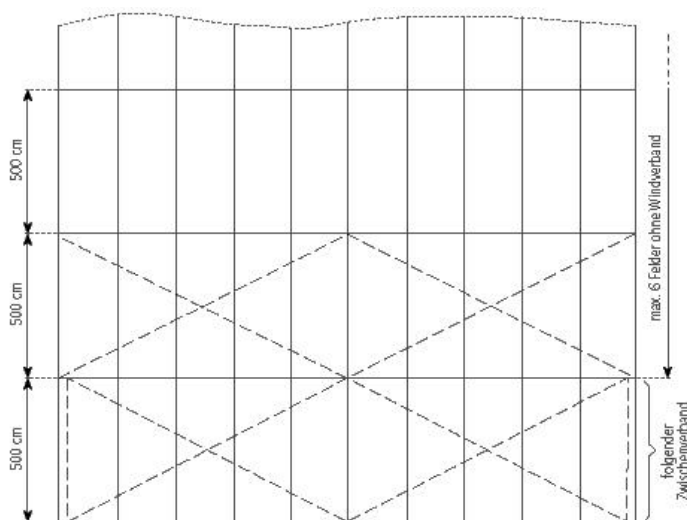

27.09.2011, www.r-zs.de/en/tents/pdf/70

RÖDER Zelt- und Veranstaltungsservice GmbH
63654 Büdingen Fon: +49 06049 700-0
Verkauf: Am Lautenstein Fax: +49 06049 700-339
Vermietung: An den Ellern Fon: +49 06049 700-309
HRB 3261, Friedberg UST.-IdNr.: DE 112607812

Geschäftsführer:
Rüdiger Blasius
Jens Brüggemann
Thomas Roman
St.-Nr.: 020 225 62014

Bank:
WGZ Bank eG
KBC Bank DTLD AG
Fortis Bank
Duns-Nr.: 32-239-9494

IBAN BLZ Konto
DE73 400 600 00 0000 772 633
DE86 500 203 00 0000 295 086
DE15 370 106 00 1102 421 161
info@r-zs.com

SWIFT/BIC
GENO DE MS
BANV DE HB 500
GEBADE 33
www.r-zs.com