

Clear-span width

1000 cm

Side height

229 cm

Ridge height

420 cm

Roof pitch

25°

Bay distance

300 cm

Gable uprights

2 gable uprights (per end)

Longest component

460 cm

Minimum tent length

600 cm

Maximum tent length

No limit

Main profile

81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3 mm)

Eave / corner connection

Internal eave insert

Max. allowed wind speed to DIN

80 km/h

Wind Load

0.3 kN/m²

Extension / lean-to options

none

Flooring options

Woodenfloor with timber or steel sub-construction

Aluminium cassettefloor with plywood or full aluminiumboards

Compactfloor




Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design

By using compactfloor or woodenfloor with steel sub-construction and weights anchoring can be omitted

Portal beams can be used in place of cross struts

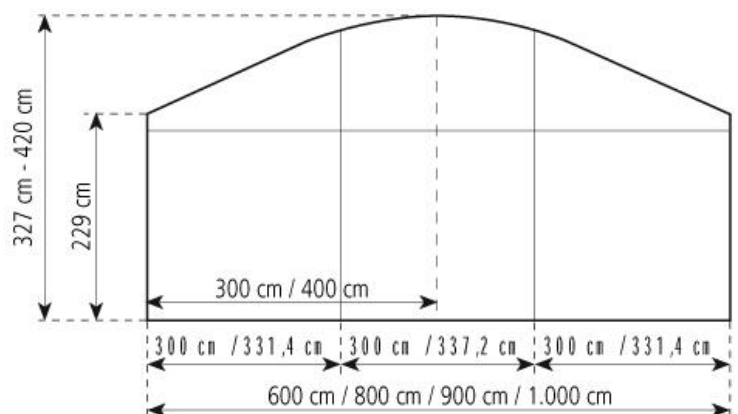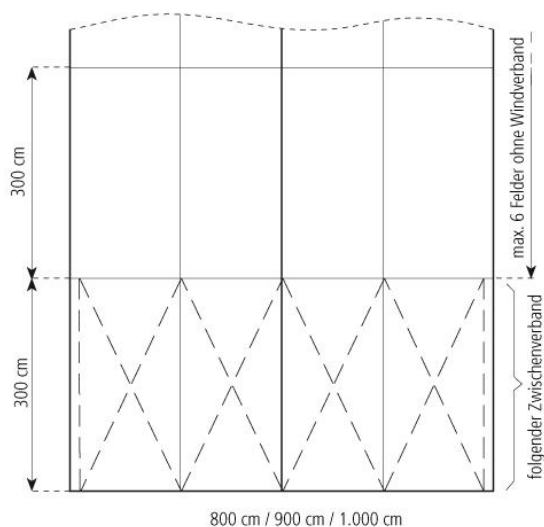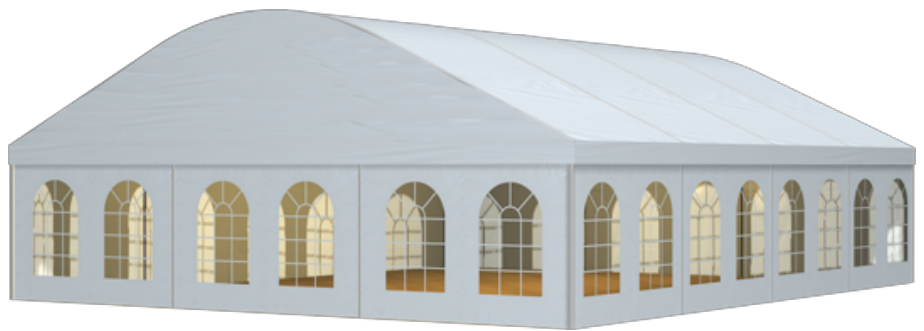

27.09.2011, www.r-zs.de/en/tents/pdf/173

RÖDER Zelt- und Veranstaltungsservice GmbH
63654 Büdingen
Verkauf: Am Lautenstein
Vermietung: An den Ellern
HRB 3261, Friedberg
Fon: +49 06049 700-0
Fax: +49 06049 700-339
Fon: +49 06049 700-309
UST.-IdNr.: DE 112607812

Geschäftsführer:
Rüdiger Blasius
Jens Brüggemann
Thomas Roman
St.-Nr.: 020 225 62014

Bank:
WGZ Bank eG
KBC Bank DTLD AG
Fortis Bank
Duns-Nr.: 32-239-9494

IBAN BLZ Konto
DE73 400 600 00 0000 772 633
DE86 500 203 00 0000 295 086
DE15 370 106 00 1102 421 161
info@r-zs.com

SWIFT/BIC
GENO DE MS
BANV DE HB 500
GEBADE 33
www.r-zs.com