

**Clear-span width**

800 cm

**Side height**

229 cm

**Ridge height**

374 cm

**Roof pitch**

25°

**Bay distance**

300 cm

**Gable uprights**

1 gable upright (per end)

**Longest component**

460 cm

**Minimum tent length**

600 cm

**Maximum tent length**

No limit

**Main profile**

81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3 mm )

**Eave / corner connection**

Internal eave insert

**Max. allowed wind speed to DIN**

80 km/h

**Wind Load**

0.3 kN/m<sup>2</sup>

**Extension / lean-to options**

none

**Flooring options**

Woodenfloor with timber or steel sub-construction

Aluminium cassettefloor with plywood or full aluminiumboards

Compactfloor



**Cover**

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

**Special design**

By using compactfloor or woodenfloor with steel sub-construction and weights anchoring can be omitted

Portal beams can be used in place of cross struts

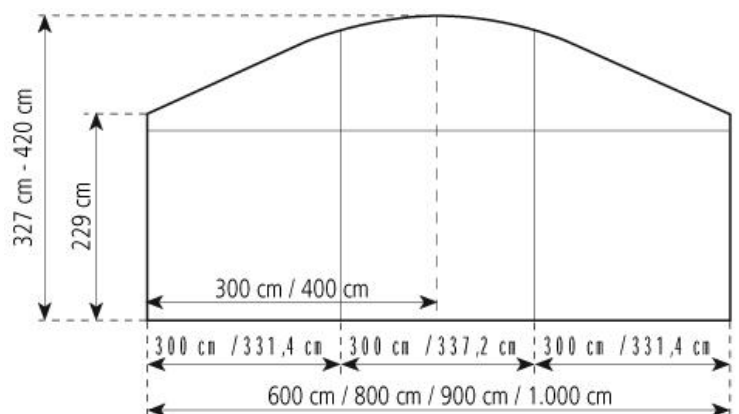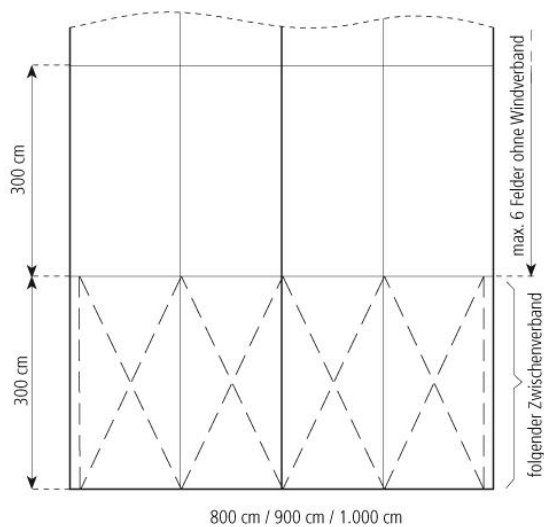

27.09.2011, [www.r-zs.de/en/tents/pdf/171](http://www.r-zs.de/en/tents/pdf/171)

RÖDER Zelt- und Veranstaltungsservice GmbH  
63654 Büdingen  
Fon: +49 06049 700-0  
Am Lautenstein  
Fax: +49 06049 700-339  
An den Ellern  
Fon: +49 06049 700-309  
HRB 3261, Friedberg  
UST.-IdNr.: DE 112607812

Geschäftsführer:  
Rüdiger Blasius  
Jens Brüggemann  
Thomas Roman  
St.-Nr.: 020 225 62014

Bank:  
WGZ Bank eG  
KBC Bank DTLD AG  
Fortis Bank  
Duns-Nr.: 32-239-9494

IBAN BLZ Konto  
DE73 400 600 00 0000 772 633  
DE86 500 203 00 0000 295 086  
DE15 370 106 00 1102 421 161  
info@r-zs.com

SWIFT/BIC  
GENO DE MS  
BANV DE HB 500  
GEBADE 33  
www.r-zs.com

Verkauf:  
Vermietung: