

Special Tent Curve tent Light 4M



Clear-span width

400 cm

Side height

229 cm

Ridge height

373 cm

Roof pitch

25°

Bay distance

300 cm

Longest component

432 cm

Minimum tent length

300 cm

Maximum tent length

No limit

Main profile

81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3 mm)

Eave / corner connection

Internal eave insert

Max. allowed wind speed to DIN

80 km/h

Wind Load

0.3 kN/m²

Flooring options

Woodenfloor with timber or steel sub-construction

Aluminium cassetefloor with plywood or full aluminiumboards

Compactfloor




Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design

Portal beams can be used in place of cross struts

By using compactfloor anchoring can be omitted

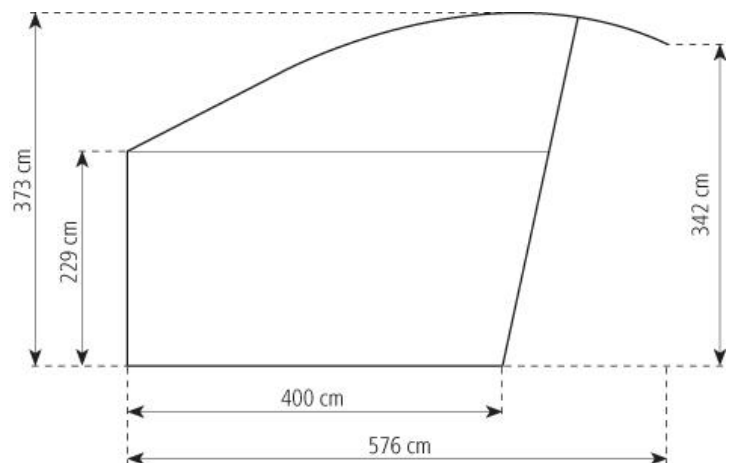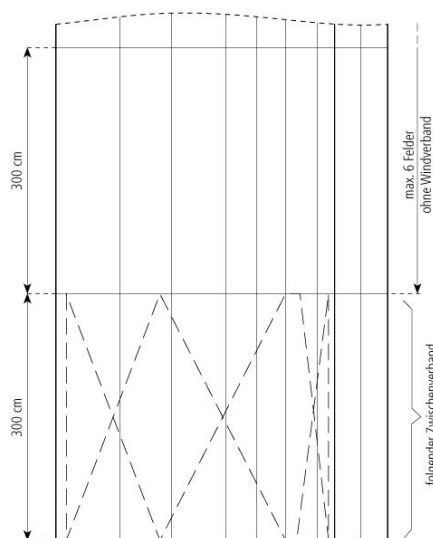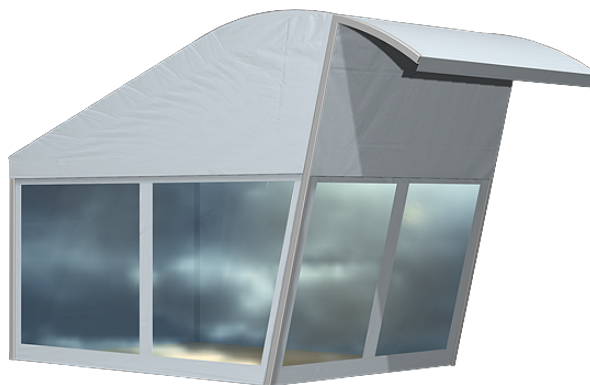

27.09.2011, www.r-zs.de/en/tents/pdf/214

RÖDER Zelt- und Veranstaltungsservice GmbH
63654 Büdingen Fon: +49 06049 700-0
Verkauf: Am Lautenstein Fax: +49 06049 700-339
Vermietung: An den Ellern Fon: +49 06049 700-309
HRB 3261, Friedberg UST.-IdNr.: DE 112607812

Geschäftsführer:
Rüdiger Blasius
Jens Brüggemann
Thomas Roman
St.-Nr.: 020 225 62014

Bank:
WGZ Bank eG
KBC Bank DTLD AG
Fortis Bank
Duns-Nr.: 32-239-9494

IBAN BLZ Konto
DE73 400 600 00 0000 772 633
DE86 500 203 00 0000 295 086
DE15 370 106 00 1102 421 161
info@r-zs.com

SWIFT/BIC
GENO DE MS
BANV DE HB 500
GEBADE 33
www.r-zs.com