

Special Tent Curve tent Medium 5M



Clear-span width

500 cm

Side height

240 cm

Ridge height

395 cm

Roof pitch

25°

Bay distance

500 cm

Longest component

556 cm

Minimum tent length

500 cm

Maximum tent length

No limit

Main profile

130 mm x 70 mm x 3 mm

Eave / corner connection

Internal eave insert

Max. allowed wind speed to DIN

80 km/h

Wind Load

0.3 kN/m²

Flooring options

Wooden floor with timber or steel

sub-construction

Aluminium cassette floor with plywood or full

aluminium boards

Compact floor




Cover

RÖDER No. 1: PVC-coated polyester textile,
flame retardant to DIN 4102 B1, M2

Special design

Portal beams can be used in place of cross
struts

By using compact floor anchoring can be omitted

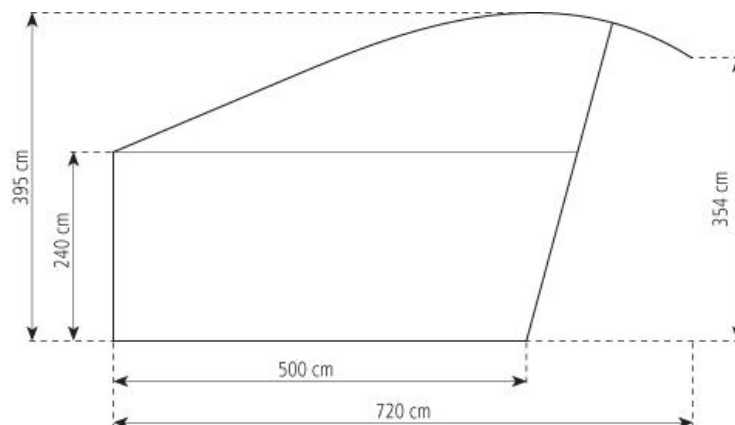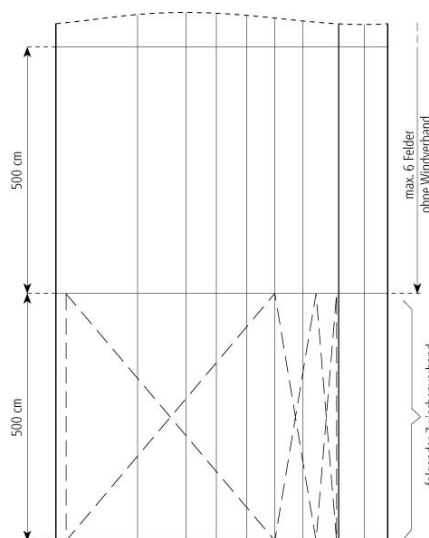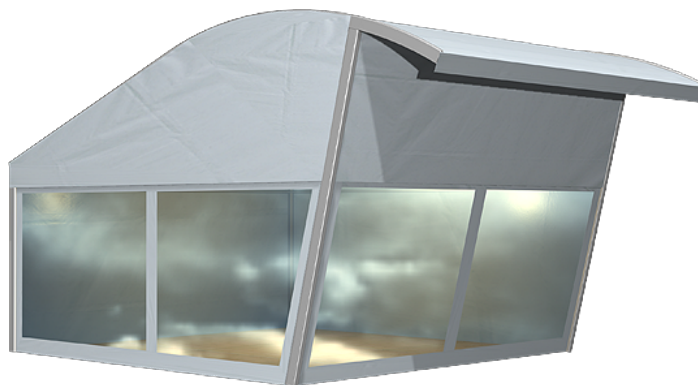

27.09.2011, www.r-zs.de/en/tents/pdf/213

RÖDER Zelt- und Veranstaltungsservice GmbH
63654 Büdingen
Fon: +49 06049 700-0
Fax: +49 06049 700-339
An den Ellern
HRB 3261, Friedberg
Fon: +49 06049 700-309
UST.-IdNr.: DE 112607812

Geschäftsführer:
Rüdiger Blasius
Jens Brüggemann
Thomas Roman
St.-Nr.: 020 225 62014

Bank:
WGZ Bank eG
KBC Bank DTLD AG
Fortis Bank
Duns-Nr.: 32-239-9494

IBAN BLZ Konto
DE73 400 600 00 0000 772 633
DE86 500 203 00 0000 295 086
DE15 370 106 00 1102 421 161
info@r-zs.com

SWIFT/BIC
GENO DE MS
BANV DE HB 500
GEBADE 33
www.r-zs.com