

Storage Tent H-Line 25M



Clear-span width

2500 cm

Side height

520 cm

Ridge height

938 cm

Roof pitch

18°

Bay distance

500 cm

Gable uprights

4 gable uprights (per end)

Longest component

1075 cm

Minimum tent length

2500 cm

Maximum tent length

No limit

Main profile

334 mm x 122 mm x 8/4.5 mm

Eave / corner connection

Internal eave insert

Max. allowed wind speed to DIN

100 km/h

Wind Load

0.5 kN/m²

Snow load

0.75 kN/m²

Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2, or inflated textile iso-roof




Special design

Portal beams can be used in place of cross struts

Trapezoidal metal sheets

Strip-galvanized, exterior color coating RAL 9002 (grey-white), protective paint coating inside

iso-sandwich elements

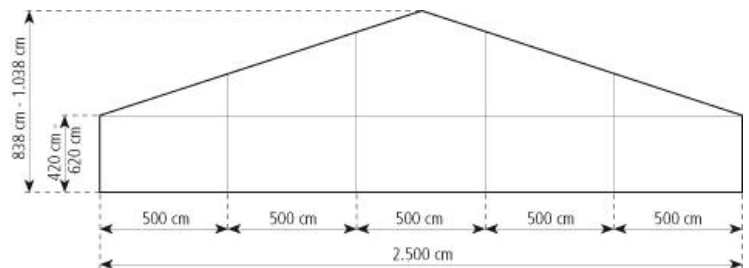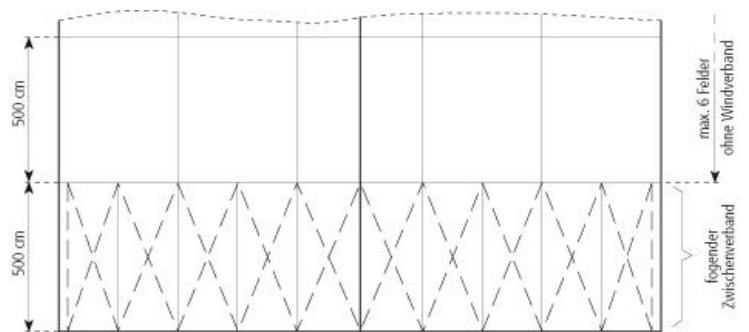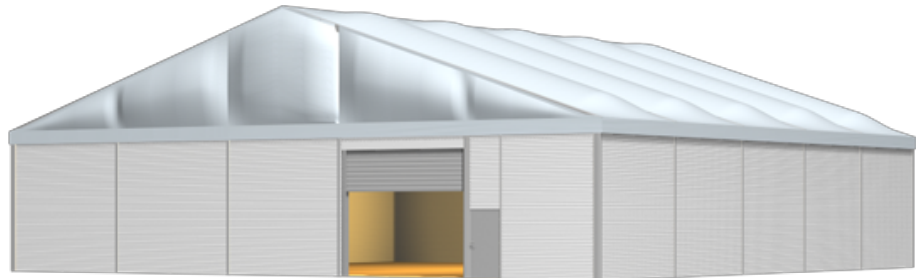

27.09.2011, www.r-zs.de/en/tents/pdf/148

RÖDER Zelt- und Veranstaltungsservice GmbH
63654 Büdingen
Fon: +49 06049 700-0
Verkauf: Am Lautenstein
Fax: +49 06049 700-339
Vermietung: An den Ellern
Fon: +49 06049 700-309
HRB 3261, Friedberg
UST.-IdNr.: DE 112607812

Geschäftsführer:
Rüdiger Blasius
Jens Brüggemann
Thomas Roman
St.-Nr.: 020 225 62014

Bank:
WGZ Bank eG
KBC Bank DTLD AG
Fortis Bank
Duns-Nr.: 32-239-9494

IBAN BLZ Konto
DE73 400 600 00 0000 772 633
DE86 500 203 00 0000 295 086
DE15 370 106 00 1102 421 161
info@r-zs.com

SWIFT/BIC
GENO DE MS
BANV DE HB 500
GEBADE 33
www.r-zs.com