

Storage Tent S75-Alu 12,5M



Clear-span width

1250 cm

Side height

350 cm

Ridge height

518 cm

Roof pitch

15°

Bay distance

250 cm

Gable uprights

2 gable uprights (per end)

Longest component

656 cm

Minimum tent length

1000 cm

Maximum tent length

No limit

Main profile

170 mm x 88 mm x 3 mm

Door sizes (PVC door panels)

Profile 170 x 88 x 3 mm:

Side wall 220 cm / 450 cm x 300 cm

Gable end 450 cm x 390 cm

Profile 220 x 100 x 3 mm:

Side wall 220 cm x 300 cm

Gable end 450 cm x 390 cm

Eave / corner connection

Internal eave insert

Max. allowed wind speed to DIN

100 km/h

Wind Load

0.5 kN/m²

Snow load

0.25 kN/m²

Cover

RÖDER No. 1: PVC-coated polyester textile,
flame retardant to DIN 4102 B1, M2



Special design

Sliding doors, rolling doors or service entrances

Trapezoidal metal sheets

Snow load 0.25 kN/m²:

Movable system on rollers

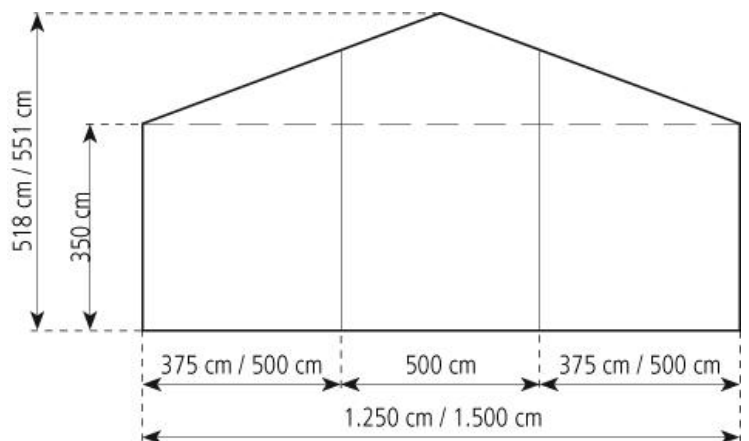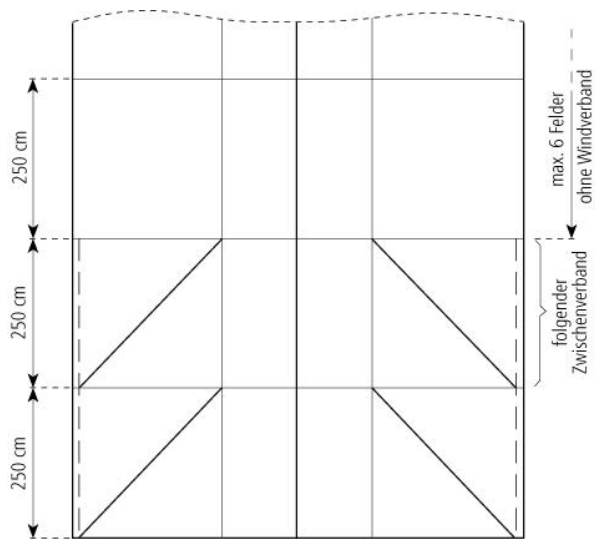

27.09.2011, www.r-zs.de/en/tents/pdf/108

RÖDER Zelt- und Veranstaltungsservice GmbH
63654 Büdingen Fon: +49 06049 700-0
Verkauf: Am Lautenstein Fax: +49 06049 700-339
Vermietung: An den Ellern Fon: +49 06049 700-309
HRB 3261, Friedberg UST.-IdNr.: DE 112607812

Geschäftsführer:
Rüdiger Blasius
Jens Brüggemann
Thomas Roman
St.-Nr.: 020 225 62014

Bank:
WGZ Bank eG
KBC Bank DTLD AG
Fortis Bank
Duns-Nr.: 32-239-9494

IBAN BLZ Konto
DE73 400 600 00 0000 772 633
DE86 500 203 00 0000 295 086
DE15 370 106 00 1102 421 161
info@r-zs.com

SWIFT/BIC
GENO DE MS
BANV DE HB 500
GEBADE 33
www.r-zs.com