

# Storage Tent S75-Alu 12,5M



## Clear-span width

1250 cm

## Side height

440 cm

## Ridge height

608 cm

## Roof pitch

15°

## Bay distance

250 cm

## Gable uprights

2 gable uprights (per end)

## Longest component

656 cm

## Minimum tent length

750 cm

## Maximum tent length

No limit

## Main profile

170 mm x 88 mm x 3 mm

## Door sizes (PVC door panels)

Profile 170 x 88 x 3 mm:

Side wall 220 cm / 450 cm x 300 cm

Gable end 450 cm x 390 cm

Profile 220 x 100 x 3 mm:

Side wall 220 cm x 300 cm

Gable end 450 cm x 390 cm

## Eave / corner connection

Internal eave insert

## Max. allowed wind speed to DIN

100 km/h

## Wind Load

0.5 kN/m<sup>2</sup>

## Snow load

0.25 kN/m<sup>2</sup>

## Cover

RÖDER No. 1: PVC-coated polyester textile,  
flame retardant to DIN 4102 B1, M2



## Special design

Sliding doors, rolling doors or service entrances

Trapezoidal metal sheets

Snow load 0.25 kN/m<sup>2</sup>:

Movable system on rollers

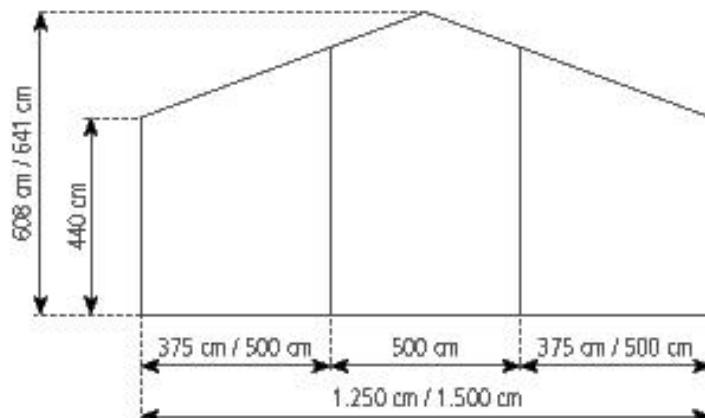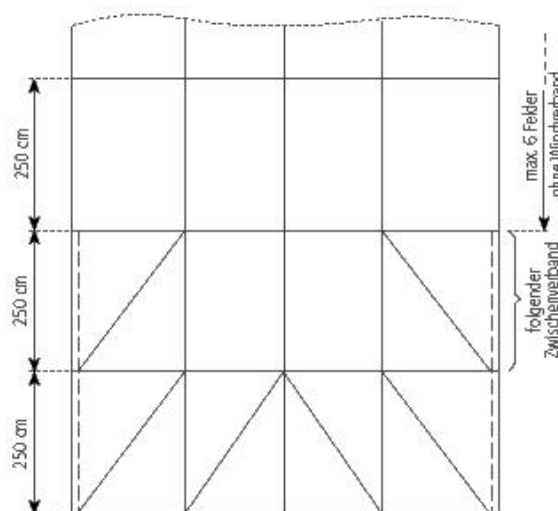

27.09.2011, [www.r-zs.de/en/tents/pdf/110](http://www.r-zs.de/en/tents/pdf/110)

RÖDER Zelt- und Veranstaltungsservice GmbH  
63654 Büdingen Fon: +49 06049 700-0  
Verkauf: Am Lautenstein Fax: +49 06049 700-339  
Vermietung: An den Ellern Fon: +49 06049 700-309  
HRB 3261, Friedberg UST.-IdNr.: DE 112607812

Geschäftsführer:  
Rüdiger Blasius  
Jens Brüggemann  
Thomas Roman  
St.-Nr.: 020 225 62014

Bank:  
WGZ Bank eG  
KBC Bank DTLG AG  
Fortis Bank  
Duns-Nr.: 32-239-9494

IBAN BLZ Konto  
DE73 400 600 00 0000 772 633  
DE86 500 203 00 0000 295 086  
DE15 370 106 00 1102 421 161  
info@r-zs.com

SWIFT/BIC  
GENO DE MS  
BANV DE HB 500  
GEBADE 33  
www.r-zs.com